



# EVERY POWER.



## A1700



### A1400 Ratings

ENGINE MODEL	ADVERTISED HORSEPOWER	PEAK TORQUE	ASPIRATION
A1700	37 BHP @ 2800 RPM	82 lb-ft @ 1600 RPM	Naturally Aspirated
A1700	32 BHP @ 2500 RPM	82 lb-ft @ 1600 RPM	Naturally Aspirated

Emission Certification: U.S. EPA Tier 2, CARB tier II, EU Stage II

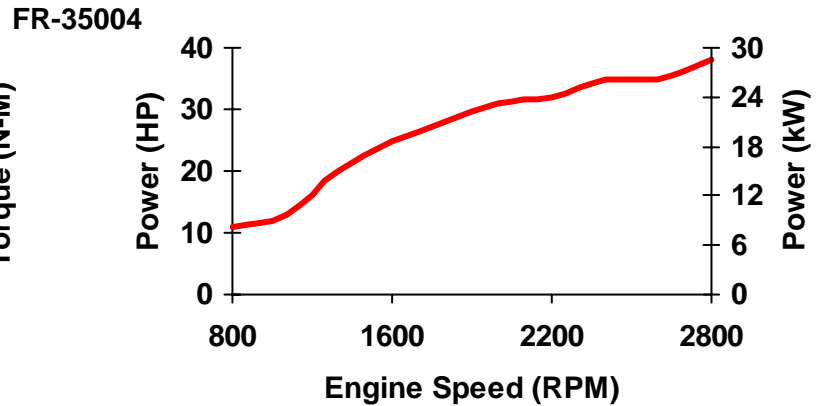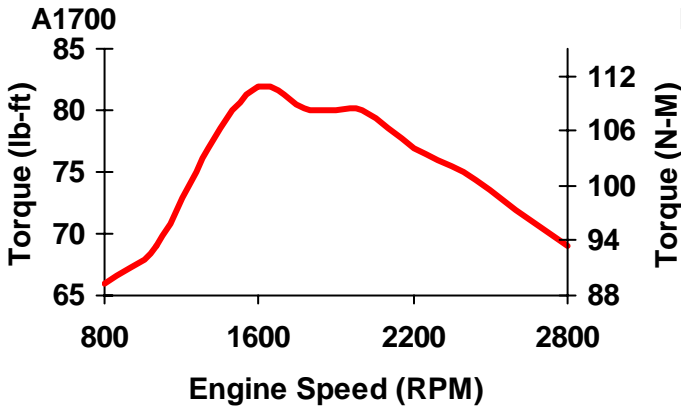

### Specifications

Advertised Horsepower	32 - 37 BHP		24 - 28 kW
Peak Torque	82 lb-ft		111 NM
Number of Cylinders	3		
Displacement	104 cu in		1.7 Liters
Bore and Stroke	3.46 in. x 3.7 in.		88 mm x 94 mm
Aspiration	Naturally Aspirated		
Oil System Capacity	5 U.S. Quarts		4.7 Liters
Power Unit Weight (Dry)	Open	508 lbs	231 kg
	Enclosed	636 lbs	289 kg
Total Cooling System Capacity	8.5 U.S. Quarts		8.04 Liters
Power Unit Size:	Open	Length	30.53 in. / 775 mm
		Width	24.31 in. / 617 mm
		Height	39.57 in. / 1005 mm
	Enclosed	Length	31.50 in. / 800 mm
		Width	24.72 in. / 628 mm
		Height	52.18 in. / 1325 mm

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in Hg (100 kPa) barometric pressure [300ft (91m) altitude] 77 deg F (25 deg C) inlet air temperature, and 0.30 in Hg (1kPa) water vapor pressure with No. 2 diesel fuel.

All data is based on the engine operating with fuel system, water pump, and 11.81 in H<sub>2</sub>O (2.939 kPa) inlet air restriction with 1.97 in (50 mm) inner diameter, and with 1.78 in Hg (6 kPa) exhaust restriction with 1.65 in (42 mm) inner diameter; not included are alternator, fan, optional equipment and driven components.

The engine may be operated without changing the fuel setting up to 5,000 ft (1,524 m) altitude and 100 deg F (38 deg C). For sustained operation at high altitudes, the fuel rate of the engine should be adjusted to limit performance by 4% per 1000 ft. (300 m) above 5,000 ft (1,524 m) altitude.

# KEY FEATURES

# A1700

**Parent Bore Cylinder Block** Structurally advanced design handles high pressures with greater durability.

**One-piece Aluminum Pistons** for dependable performance.

**Indirect Injection** for lower noise, reduced emissions, and enhanced cold weather starting.

**Gear-Driven** hydraulic pump drives with front- and rear-mounting capabilities.

**Single-Side Service** with lube filter, fuel filter, dipstick, and top or side oil fill options.

**Quiet operation** makes the A Series engine suitable in many environments.

**Air Cleaner** Heavy duty industrial air cleaners with aluminized tubing. Safety elements included within the air cleaners and restriction indicators available.

**Baserail Mounting** Made of heavy duty formed C channel. All metal components are powder coated. Passes a 1000 hours salt water test.

**Cooling System** Heavy duty radiator assembly with jacket water cooling. Sucker or blower fan arrangements available. Painted water tubes. radiator shroud, fan and belt guarding included. Radiator is isolated.

**Enclosure** Fully enclosed power unit available. Enclosure housings uses 12-gauge steel. All components are powder-coated, which increases chip resistance. Passes a 1,000-hour salt spray tests. Components are bolted, not welded, so they resist mounting distortion and are easier to service. Removable side doors for easy engine serviceability.

**Exhaust** Heavy duty industrial muffler provided.

**Cummins Industrial Warranty** Coverage for two years or 2000 hours of operation, whichever occurs first, from the date of delivery of the power unit to the first user, or from the date the unit is first leased, rented or loaned, or when the power unit has been operated for 50 hours, whichever comes first. If the 2000 hour limit is exceeded during the first year, coverage continues until the end of the first year.

## CUMMINS POWER PRODUCTS

21810 Clessie Court  
New Hudson, Michigan 48165  
Phone: 248-573-1600  
Fax: 248-573-4014  
Internet: [cpp.cummins.com](http://cpp.cummins.com)

Available Options	Standard	Optional
Air Cleaner 25 g/cfm w / Safety Element - Open Rear Mount	■	
Air Cleaner 25 g/cfm w / Safety Element - Enclosed Top Mount	■	
Decal Option / parts Manual	■	
Throttle Control	■	
Full Enclosure	■	
Electrical Wiring 12 Volt	■	
Heater Starting Aid (glow plug)	■	
Instrument panel mount - Open	■	
Instrument Panel - Sw itch Gauges; Includes Murphy shutdown, electro-mechanical oil pressure and w ater temp., voltmeter, and tachometer / hourmeter gauges, key sw itch, isolated panel.	■	
Instrument Panel - Hourmeter is the only gauge in panel.		■
Baserail Engine Sub Base Isolated	■	
Baserail Engine Sub Base - Special Isolated Side Mount		■
Packing / Shipping Skid	■	
Cooling System - Sucker; Includes Radiator, fan, shroud, positive deaeration tank, guarding, tubes.	■	
Cooling System - Blow er; Includes radiator, fan, shroud, positive deaeration tank, guarding, tubes.		■
Restriction Indicator - Air Cleaner		■
Stone Guard - Grill Type	■	
Exhaust System	■	