



EVERY POWER.

B4.5T





B4.5 Ratings

ENGINE MODEL	ADVERTISED HORSEPOWER	PEAK TORQUE	ASPIRATION
B4.5T	99 BHP @ 2500 RPM	305 lb-ft @ 1500 RPM	Turbocharged
B4.5T	92 BHP @ 2200 RPM	300 lb-ft @ 1500 RPM	Turbocharged

ADDITIONAL RATINGS ARE AVAILABLE.. CHECK WITH YOUR CUMMINS DISTRIBUTOR.

Emission Certification: U.S. EPA Tier 2, CARB tier II, EU Stage II

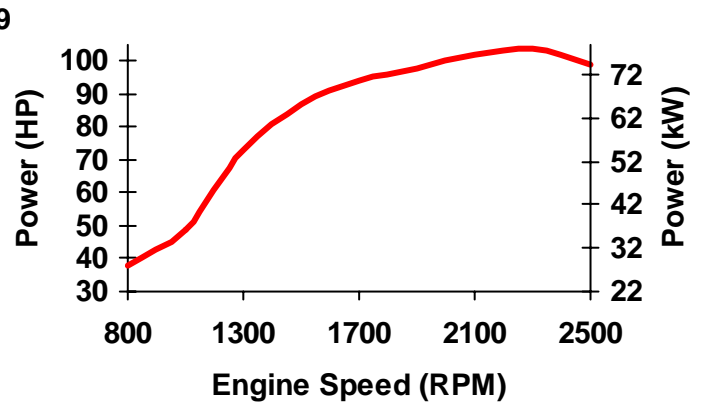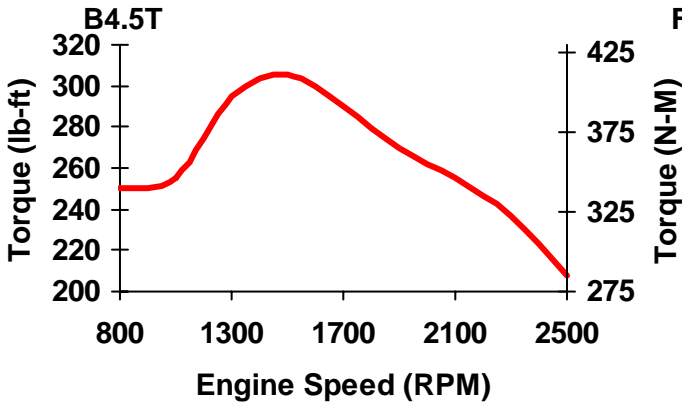

Specifications

Advertised Horsepower		92 - 99 BHP	69 - 74 kW
Peak Torque		305 lb-ft	414 NM
Number of Cylinders		4	
Displacement		275 cu in	4.5 Liters
Bore and Stroke		4.02 in. x 5.42 in.	102 mm x 138 mm
Aspiration		Turbocharged	
Oil System Capacity		10 U.S. Quarts	9.4 Liters
Power Unit Weight (Dry)	Open	1208 lbs	548 kg
	Enclosed	1332 lbs	604 kg
Total Cooling System Capacity		23.8 U.S. Quarts	22.53 Liters
Power Unit Size:	Open	Length	52.30 in. / 1328 mm
		Width	29.25 in. / 743 mm
		Height	65.40 in. / 1661 mm
	Enclosed	Length	43.00 in. / 1092 mm
		Width	31.48 in. / 800 mm
		Height	60.81 in. / 1533 mm

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in Hg (100 kPa) barometric pressure [300ft (91m) altitude] 77 deg F (25 deg C) inlet air temperature, and 0.30 in Hg (1kPa) water vapor pressure with No. 2 diesel fuel.

All data is based on the engine operating with fuel system, water pump, and 9.84 in H₂O (2.449 kPa) inlet air restriction with 3.94 in (100 mm) inner diameter, and with 1.97 in Hg (7 kPa) exhaust restriction with 2.95 in (75 mm) inner diameter; not included are alternator, fan, optional equipment and driven components.

The engine may be operated without changing the fuel setting up to 10,000 ft (3,048 m) altitude and 100 deg F (38 deg C). For sustained operation at high altitudes, the fuel rate of the engine should be adjusted to limit performance by 4% per 1000 ft. (300 m) above 10,000 ft (3,048 m) altitude.

KEY FEATURES

B4.5T

Parent Bore Cylinder Block Structurally advanced design handles high pressures with greater durability.

Direct Injection for increased fuel efficiency, low heat rejection, and quicker starts.

Quiet operation makes the B Series engine suitable in many environments.

Air Cleaner Heavy duty industrial air cleaners with aluminized tubing. Safety elements included within the air cleaners and restriction indicators available.

Baserail Mounting Made of heavy duty formed C channel. All metal components are powder coated. Passes a 1000 hours salt water test.

Cooling System Heavy duty radiator assembly with jacket water cooling. Sucker or blower fan arrangements available. Painted water tubes. radiator shroud, fan and belt guarding included. Radiator is isolated.

Instrument Panel Operates on 12 or 24 volt using mechanical and electro-mechanical gauges. Shutdown protection provided through a Murphy shutdown protection relay. Isolated inner panel within an outer protective lockable box. Available on right or left hand side of unit. Nema panels also available.

Clutches Over center clutches available depending on application. Provided primarily by Twin Disc.

Enclosure Fully enclosed power unit available. Enclosure housings uses 12-gauge steel. All components are powder-coated, which increases chip resistance. Passes a 1,000-hour salt spray tests. Components are bolted, not welded, so they resist mounting distortion and are easier to service. Removable side doors for easy engine serviceability.

Exhaust Heavy duty industrial muffler provided.

Cummins Industrial Warranty Coverage for two years or 2000 hours of operation, whichever occurs first, from the date of delivery of the power unit to the first user, or from the date the unit is first leased, rented or loaned, or when the power unit has been operated for 50 hours, whichever comes first. If the 2000 hour limit is exceeded during the first year, coverage continues until the end of the first year.

CUMMINS POWER PRODUCTS

21810 Clessie Court
New Hudson, Michigan 48165
Phone: 248-573-1600
Fax: 248-573-4014
Internet: cpp.cummins.com

Available Options	Standard	Optional
Air Cleaner 25 g/cfm w / Safety Element - Open Rear Mount	■	
Air Cleaner 25 g/cfm w / Safety Element - Enclosed Top Mount	■	
Tw in Disc Clutch		■
Decal Option / parts Manual	■	
Engine Harness Option	■	
Throttle Control	■	
Full Enclosure	■	
Electrical Wiring 12 Volt	■	
Electrical Wiring 24 Volt		■
Heater Starting Aid (grid)		■
Instrument panel mount - Open	■	
Instrument Panel - Sw itch Gauges; Includes Murphy shutdown n, electro-mechanical oil pressure and w ater temp., voltmeter, and tachometer / hourmeter gauges, key sw itch, isolated panel.	■	
Instrument Panel - Hourmeter is the only gauge in panel.		■
Instrument Panel - Nema Enclosure		■
12-Foot Harness		■
24-Foot Harness		■
Baserail Engine Sub Base Non-Isolated	■	
Baserail Engine Sub Base Isolated		■
Baserail Engine Sub Base - Special Isolated Side Mount		■
Packing / Shipping Skid	■	
Cooling System - Sucker; Includes Radiator, fan, shroud, positive deaeration tank, guarding, tubes.	■	
Cooling System - Blow er; Includes radiator, fan, shroud, positive deaeration tank, guarding, tubes.		■
Restriction Indicator - Air Cleaner		■
Stone Guard - Grill Type	■	
Stone Guard - Serpentine Type		■
Exhaust System	■	