



EVERY POWER.



QSB5.9

QSB5.9 Ratings

ENGINE MODEL	ADVERTISED HORSEPOWER	PEAK TORQUE	Aspiration
QSB5.9	275 HP @ 2500 RPM*	730 LB-FT @ 1500 RPM	Turbocharged / Charge Air Cooler
QSB5.9	240 HP @ 2500 RPM	730 LB-FT @ 1500 RPM	Turbocharged / Charge Air Cooler
QSB5.9	220 HP @ 2500 RPM	670 LB-FT @ 1500 RPM	Turbocharged / Charge Air Cooler
QSB5.9	205 HP @ 2200 RPM	285 LB-FT @ 1500 RPM	Turbocharged / Charge Air Cooler

ADDITIONAL RATINGS ARE AVAILABLE. CHECK WITH YOUR CUMMINS DISTRIBUTOR. * Restricted Rating

Emission Certification: U.S. EPA Tier 2, CARB Tier 2, JMLIT Step 2, NRMM (Europe) Stage II

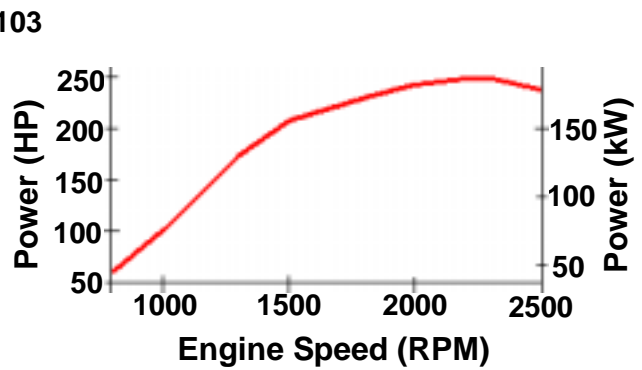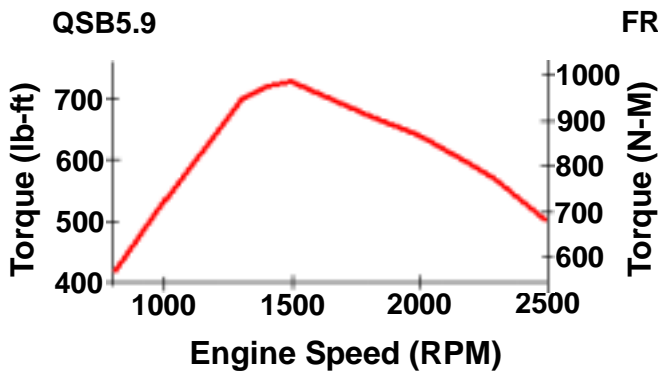

Specifications

Advertised Horsepower		185-275 BHP	138-205 kW
Peak Torque		520-730 LB-FT	705-990 NM
Number of Cylinders		6	
Displacement		360 cu in	5.9 liters
Bore and Stroke		4.02 in. x 4.72 in.	102 mm x 120 mm
Aspiration		Turbocharged and Charge Air Cooled	
Oil System Capacity		17.2 U.S. Quarts	16.3 Liters
Power Unit Weight (Dry)	Open	1700 lbs	771 Kg
	Enclosed	1940 lbs	880 Kg
Total Cooling System Capacity		40 U.S. Quarts	37.80 Liters
Power Unit Size:	Open	Length	69.05 in. / 1754 mm
		Width	33.91 in. / 861 mm
		Height	80.76 in. / 2051 mm
	Enclosed	Length	59.25 in. / 1505 mm
		Width	38.70 in. / 983 mm
		Height	71.10 in. / 1806 mm

Curves shown above represent gross engine performance capabilities obtained and corrected in accordance with SAE J1995 conditions of 29.61 in Hg (100 kPa) barometric pressure [300ft (91m) altitude] 77 deg F (25 deg C) inlet air temperature, and 0.30 in Hg (1kPa) water vapor pressure with No. 2 diesel fuel.

All data is based on the engine operating with fuel system, water pump, and 9.84 in H₂O (250 mm H₂O) inlet air restriction with 3.94 in (100 mm) inner diameter, and with 1.97 in Hg (50 mm Hg) exhaust restriction with 2.95 in (75 mm) inner diameter; not included are alternator, fan, optional equipment and driven components.

The engine may be operated without changing the fuel setting up to 2300 m (7546ft.) altitude and 100 deg F (38 deg C). For sustained operation at high altitudes, the fuel rate of the engine should be adjusted to limit performance by 4% per 300 m (1000 ft.) above 2300m (7546ft.) altitude.

CUMMINS POWER PRODUCTS

KEY FEATURES

QSB5.9

Holset Turbochargers Wastegated designs optimize operations for improved response across the torque curves.

Full-Authority Electronic Controls Optimized engine operation, diagnostics, prognostics and more. Industry standard datalinks.

Parent Bore Cylinder Block Structurally advanced design handles high pressures with greater durability.

Quiet operation makes the B Series engine suitable in many environments.

Air Cleaner Heavy duty industrial air cleaners with aluminized tubing. Safety elements included within the air cleaners and restriction indicators available.

Baserail Mounting Made of heavy duty formed C channel. All metal components are powder coated. Passes a 1000 hours salt water test.

Cooling System Heavy duty radiator assembly with jacket water and charge air cooler incorporated within assembly. Sucker or blower fan arrangements available. Aluminized charge air cooler tubes and painted water tubes. Radiator shroud, fan and belt guarding included. Radiator is isolated.

Instrument Panel Operates on 12 or 24 volt using the Murphy Powerview Module. J1939 communication with a 9 pin diagnostic connection. Shutdown protection provided through the ECM. Isolated inner panel within an outer protective lockable box. Available on right or left hand side of unit. Nema panels also available.

Clutches Over center clutches available depending on application. Provided primarily by Twin Disc.

Enclosure Fully enclosed power unit available. Enclosure housings uses 12-gauge steel. All components are powder-coated, which increases chip resistance. Passes a 1,000-hour salt spray tests. Components are bolted, not welded, so they resist mounting distortion and are easier to service. Removable side doors for easy engine serviceability.

Exhaust Heavy duty industrial muffler provided.

Cummins Industrial Warranty Coverage for two years or 2000 hours of operation, whichever occurs first, from the date of delivery of the power unit to the first user, or from the date the unit is first leased, rented or loaned, or when the power unit has been operated for 50 hours, whichever comes first. If the 2000 hour limit is exceeded during the first year, coverage continues until the end of the first year.

CUMMINS POWER PRODUCTS

21810 Clessie Court
New Hudson, Michigan 48165
Phone: 248-573-1600
Fax: 248-573-4014
Internet: cpp.cummins.com

Bulletin 99000153 Printed in USA Rev 4/04

Available Options	Standard	Optional
Air Cleaner 25 g/cfm w/ Safety Element - Open Rear Mount	■	
Air Cleaner 25 g/cfm w/ Safety Element - Enclosed Top Mount	■	
Air Cleaner 25 g/cfm w/ Safety Element - Enclosed Rear Mount		■
Twin Disc Clutch		■
Decal Option / parts Manual	■	
Engine Harness Option	■	
Linear Throttle Control		■
Full Enclosure	■	
Electrical Wiring 12 Volt	■	
Electrical Wiring 24 Volt		■
Heater Starting Aid		■
Instrument panel mount - Open	■	
Instrument Panel - Powerview; Includes Murphy Powerview w/ oil pressure, water temp., voltmeter, and tachometer gauges, key switch, run/idle switch, 9 pin J1939 diagnostic port, and isolated panel within enclosed lockable box.	■	
Instrument Panel - Switch Gauges; Includes Murphy shutdown, electro-mechanical oil pressure and water temp., voltmeter, and tachometer / hourmeter gauges, key switch, isolated panel within enclosed lockable box.		■
Instrument Panel - Nema Enclosure		■
12 Foot Extension Harness		■
24 Foot Extension Harness		■
Baserail Engine Sub Base non-isolated	■	
Baserail Engine Sub Base - Extended for Clutch Support		■
Packing / Shipping Skid	■	
Cooling System - Sucker; Includes Radiator, fan, shroud, positive deaeration tank, guarding, tubes.	■	
Cooling System - Blower; Includes radiator, fan, shroud, positive deaeration tank, guarding, tubes.		■
Restriction Indicator - Air Cleaner		■
Stone Guard - Grill Type	■	
Stone Guard - Serpentine Type		■
Coolant Level Safety Shutdown	■	
Exhaust System	■	